


Assembly Instruction Sheet #IS-5206P40C For Style 5206P40C

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.
Light Source: (8) E12 Candelabra Base Bulbs 60W Maximum(Not Include).
Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

⚠ Warnings and Cautions
 Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt. These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation. Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.


Package Contents

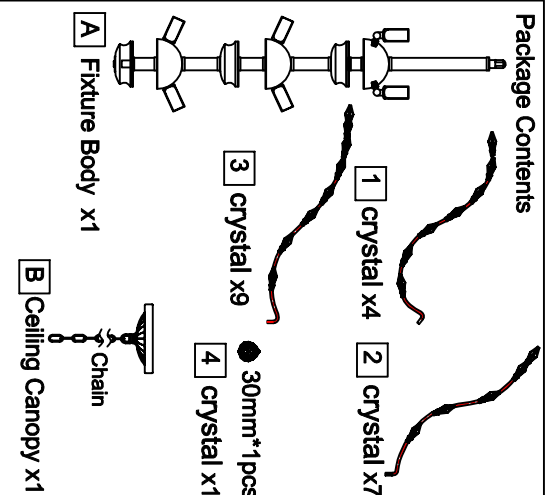

Hardware Contents

PART	DESCRIPTION	QUANTITY
BB	Wire nut	2pcs
EE	Outlet Box Screw	2pcs


STEP 1 - Install the Canopy Chain Loop and Nipple

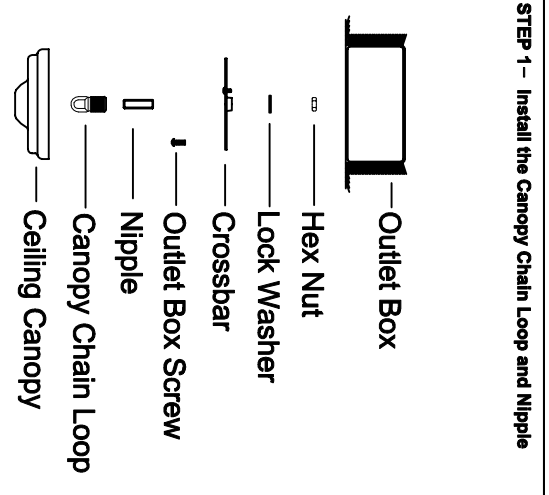

Outlet Box
 Hex Nut
 Lock Washer
 Crossbar
 Outlet Box Screw
 Nipple
 Canopy Chain Loop
 Ceiling Canopy
 Canopy Lock Ring

Figure 1

STEP 2 - Install the Fixture Chain and Ceiling Canopy

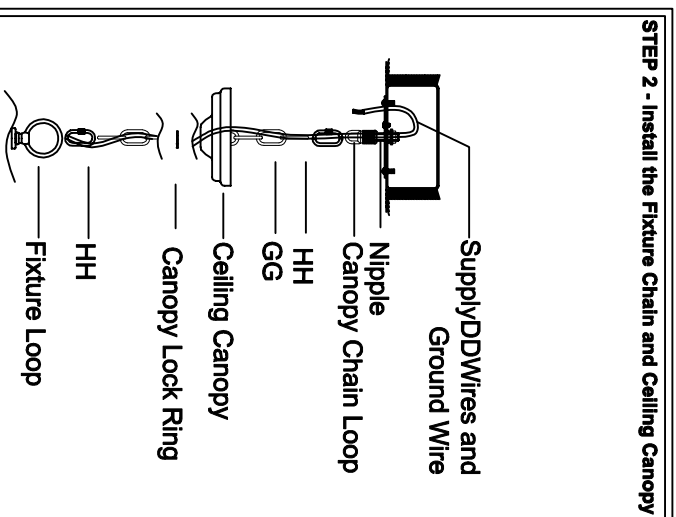


Supply/DWires and Ground Wire
 Nipple
 Canopy Chain Loop
 HH
 GG
 Ceiling Canopy
 Canopy Lock Ring
 HH
 Fixture Loop

Figure 2

STEP 3 - Wire Connections


A. Use standard wire connectors (not included) to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

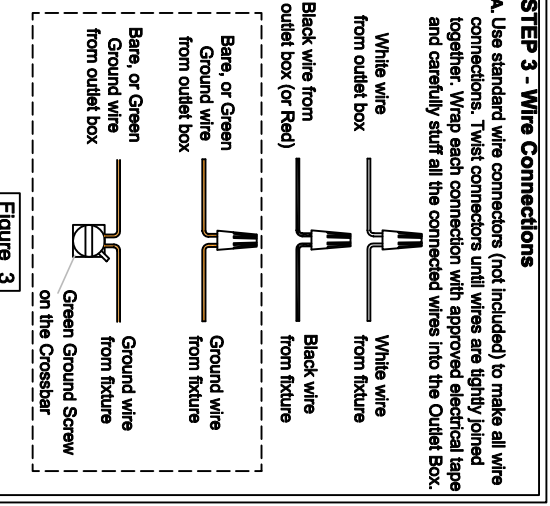

White wire from outlet box
 White wire from fixture
 Black wire from outlet box (or Red)
 Black wire from fixture
 Bare, or Green Ground wire from outlet box
 Ground wire from fixture
 Bare, or Green Ground wire from outlet box
 Ground wire from fixture
 Green Ground Screw on the Crossbar

Figure 3

STEP 4 - Install Bulbs.

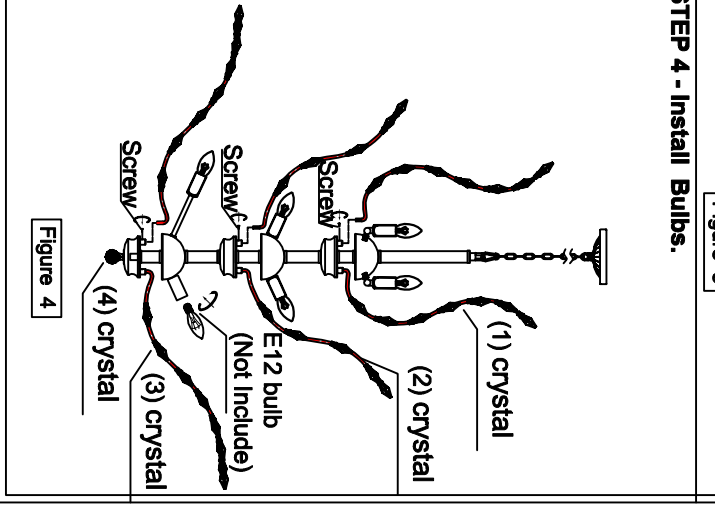

(1) crystal
 (2) crystal
 E12 bulb (Not Include)
 (3) crystal
 (4) crystal

Figure 4