

Assembly Instruction Sheet #IS-5555P22SN For Style 5555P22SN

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.
Light Source: (5) E26 Base Bulb 60W Maximum.
Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt. These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation. Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.


Package Contents

- A** Fixture Body x1
- B** Middle Rod
 - B1 4" 2pcs
 - B2 6" 1pcs
 - B3 12" 5pcs
- C** Glass x1
- D** Finial and mobile x1
- E** canopy x1

Hardware Contents


- | PART | DESCRIPTION | QUANTITY |
|------|--------------------|----------|
| AA | Decorative Caps | 2pcs |
| BB | Electrical Nipples | 2pcs |
| CC | Outlet Box Screw | 2pcs |
| DD | Mounting Screw | 2pcs |
| EE | Crossbar | 1pcs |

STEP 1 - Install Rods to Fixture Body

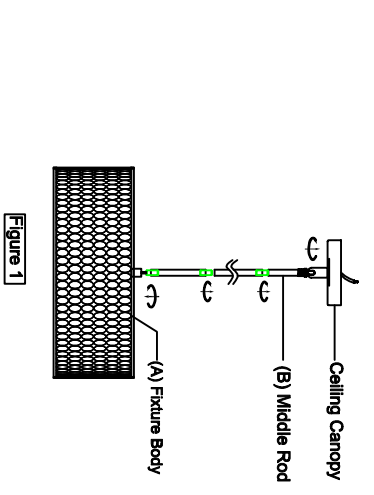


STEP 2 - Attach Crossbar to Outlet Box


A. Pass the supply wires through the Crossbar (EE). Attach the Crossbar (EE) to the Outlet Box (CC) with the head of the Green Ground Screw facing you. Secure it with Outlet Box Screws(CC). Tighten until snug.

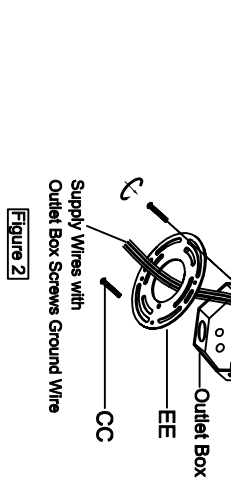

STEP 3 - Attach Mounting Screws, Lock Washers and Hex Nuts to Crossbar

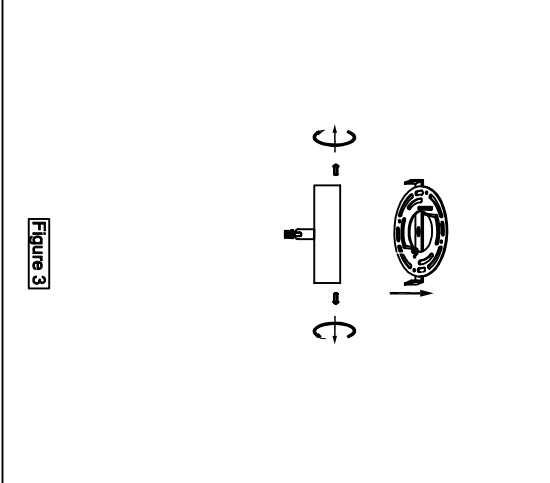


STEP 6 - Install Ceiling Canopy to Ceiling

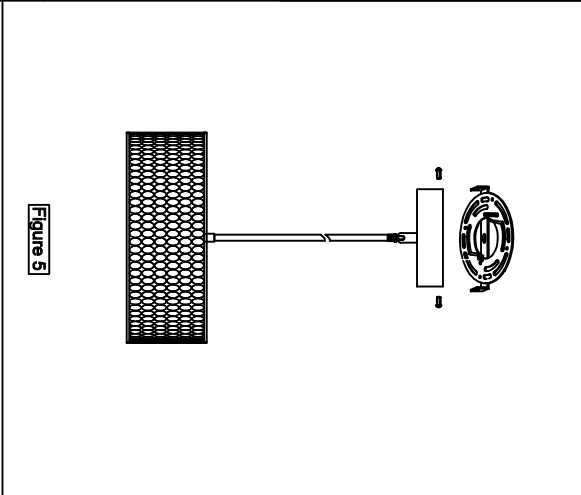

STEP 4 - Wire Connections

A. Use standard wire connectors to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

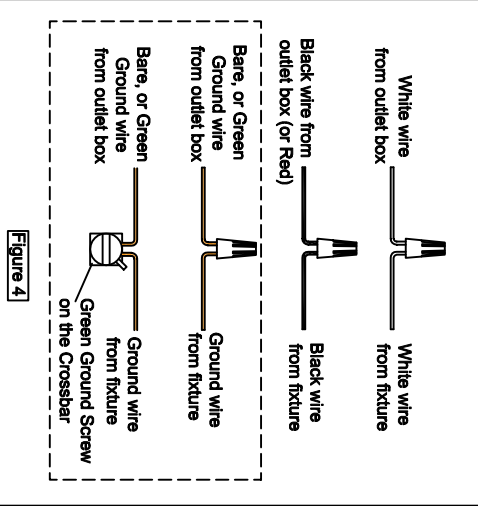

STEP 7 - Install glass and bulb.

A. Install bulbs onto sockets and push snug into place.
 B. Screw up the Middle with the Fixture Body. Loos the Finial on the Nibble.
 C. Screw up the Metal Ring with the Nibble then install the Glass Panel under the Metal cover. Lock them with the other Metal cover and Finial. Tighten them together.

