


ITEM: 622-1F

 INNOVATIONS LIGHTING
CREATIVITY MEETS EVOLUTIONARY DESIGN®
DESIGN COPYRIGHT – 22/03/2023
ALL RIGHTS RESERVED AND MAY
NOT BE DUPLICATED WITHOUT OUR
WRITTEN PERMISSION

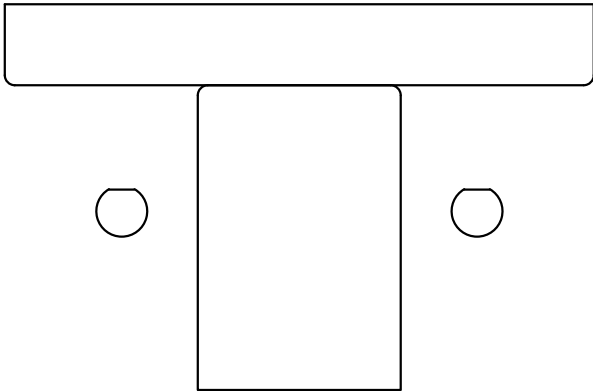


PLACE THE COVER PLATE
ONTO THE FIXTURE MOUNTING
SCREWS AND SECURE IT INTO
PLACE USING THE DECORATIVE
NUTS PROVIDED.

SCREW LIGHT BULBS INTO THE
SOCKETS AND MAKE SURE THEY
DO NOT EXCEED THE MAXIMUM
WATTAGE SPECIFIED ON THE
FIXTURE'S WATTAGE RATING LABEL

THE LAMP BODY EXCLUDE
LIGHT BULBS

TO CLEAN, WIPE FIXTURE WITH A
SOFT CLOTH. CLEAN GLASS WITH
A MILD SOAP. DO NOT USE ABRASIVE
MATERIALS SUCH AS SCOURING PADS
OR POWDERS, STEEL WOOL OR
ABRASIVE PAPER

STANDARD MOUNTING PLATE INSTALLATION INSTRUCTIONS

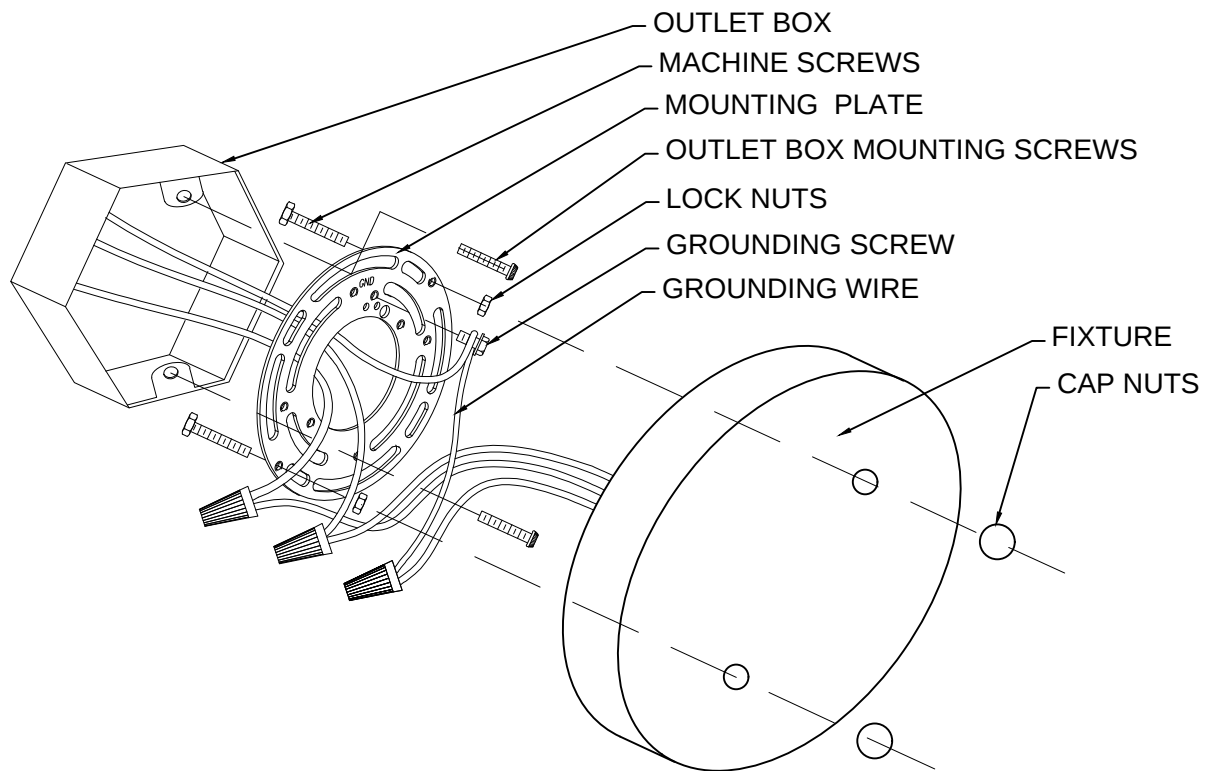

CAUTION: DISCONNECT POWER DURING INSTALLATION

- 1.) If you are replacing an existing fixture, disconnect and remove the old fixture. Expose the supply wiring from the outlet box.
- 2.) Thread the machine screws into the opposite side of the mounting plate from the green ground screw, lock the machine screws into place with lock nuts.
- 3.) Fasten the mounting plate to the outlet box using the two screws supplied with the outlet box.
- 4.) Spread the electrical wires so that the black wires are on one side of the outlet box and the white wires are on the other side.
- 5.) Grounding instructions:
 - A.) On fixtures where mounting plate is provided with a green ground screw and two raised dimples, Wrap ground wire from outlet box around green ground screw and tighten.
 - B.) On fixtures where mounting plate is provided with a green ground wire attached. Connect mounting plate ground wire to ground wire from outlet box with wire connector(not provided). If fixture is provided with ground wire. Connect fixture ground wire to ground wire from outlet box with wire connector(not provided). After following the above steps. Never connect ground wire to black or white power supply wires.
- 6.) To make electrical connections: Connect the white wire(s) from the fixture to the white wire of this outlet box. Connect the black wire(s) from the fixture to the black wire of the outlet box. NOTE: Black outlet box wire may be red, round & smooth and/or have copper conductor. White outlet box wire may be square & ridged and/or have a silver conductor.
- 7.) Place fixture against mounting surface allowing the machine screws to pass through the fixture backplate. Secure with cap nuts.